



PRODUCT DESCRIPTION


LUCCA is a bidirectional indoor luminaire, with downward and upward light projection. With anodized aluminum profile and matte diffuser. It is a versatile option that can be used for commercial or architectural applications. With the possibility of continuous installation, it can be installed suspended or on a wall.

DESCRIÇÃO DO PRODUTO


LUCCA é uma luminária de interior bidirecional, com projeção de luz descendente e ascendente. Com perfil de alumínio anodizado e difusor fosco. É uma opção versátil que poderá ser usada para aplicação comercial ou arquitetónica. Com possibilidade de instalação em continuidade, pode ser instalada suspensa ou em parede.

DESCRIPCIÓN DEL PRODUCTO

LUCCA es una luminaria de interior bidireccional, con proyección de luz hacia abajo y hacia arriba. Con perfil de aluminio anodizado y difusor mate. Es una opción versátil que se puede utilizar para aplicaciones comerciales o arquitectónicas. Con posibilidad de instalación continua, se puede instalar suspendido o en pared.

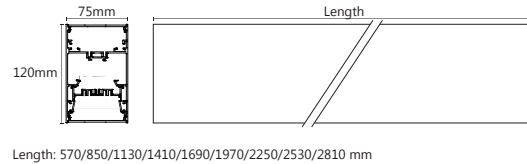

REFERENCE	63120.LGTH.MA.CT.C.I
LED POWER (TOP)	16/24/32/40/48/56/64/72/80W
LUMINOUS FLUX (TOP) @3000K	2560/3840/5120/6400/7680/8960/10240/11520/12800lm
LED POWER (DOWN)	16/23/31/39/47/55/62/70/78W
LUMINOUS FLUX (DOWN) @3000K	2700/4050/5400/6750/8100/9450/10800/12150/13500lm
ELECTRICAL CURRENT	225mA/350mA/400mA
KIND OF LED	Module PCB Tridonic
DRIVER	Tridonic
COLOR CONSISTENCY	3 Step MacAdam
INSULATION CLASS	Class I
PRODUCT LIFE TIME	50 000h

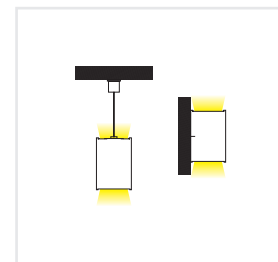

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

LED

874/2012

The light source in this luminaire must be replaced by the manufacturer, its maintenance service or a similarly qualified technician.

LUCCA 75 DATASHEET

OPTIONS

MODEL.LGHT.MA.CT.C.I

Model (MODEL)	Lenght (LGHT)	Electrical Current (MA)	Color Temperature (CT)	Finishing Color (C)	CRI (I)
75120 LUCCA 75	0570 570mm	02 225mA	27 2700K	1 Grey ●	8 >80
	0850 850mm	03 350mA	30 3000K	2 Black ●	
	1130 1130mm	04 400mA	40 4000K	3 White ○	
	1410 1410mm				
	1690 1690mm				
	1970 1970mm				
	2250 2250mm				
	2530 2530mm				
	2810 2810mm				

MODEL . LGTH . MA . CT . C . I	LED POWER ↓	LUMINOUS FLUX ↓ @350mA @3000K	LED POWER ↑	LUMINOUS FLUX ↑ @350mA @3000K
75120 . 0570 . 03 . CT . C . I	16W	2700lm	16W	2560lm
75120 . 0850 . 03 . CT . C . I	23W	4050lm	24W	3840lm
75120 . 1130 . 03 . CT . C . I	31W	5400lm	32W	5120lm
75120 . 1410 . 03 . CT . C . I	39W	6750lm	40W	6400lm
75120 . 1690 . 03 . CT . C . I	47W	8100lm	48W	7680lm
75120 . 1970 . 03 . CT . C . I	55W	9450lm	56W	8960lm
75120 . 2250 . 03 . CT . C . I	62W	10800lm	64W	10240lm
75120 . 2530 . 03 . CT . C . I	70W	12150lm	72W	11520lm
75120 . 2810 . 03 . CT . C . I	78W	13500lm	80W	12800lm

PRODUCT APPLICATION

