

Light Measurement Report

Print date: 19/02/2026

Measurement date and time: 18/02/2026 11:20:23 – Measurement no. VFR-260218-1260-MS

Measurement tracking No. and Link: [VT260218-005109](#)

Operator: LC



Laboratory and Equipment

Laboratory Owner and Location

Goniospectrometer System and Type

Sensor Name, Calibr. Date and Serial No.

Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark

LabSpion – Type C, horizontal

LabSensor Model2 – 11/12/2024 – 3532797498

Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

Measurement Conditions

Number of C-planes and Resolution

γ (gamma)-Resolution

Test Distance

Input Power, Power and Displ. Factors

Input RMS Voltage and Current

Frequency of Input Power

Warm-up Time and Variation

12 planes – 30°

1,5°

0,97 m

33,2 W – PF 0,98 – DPF 0,98

217 V – 0,156 A

50 Hz

Lamp stabilized in 18 min 28 sec – 2,0%

Tested Light Source

Product Name

Item No. and Manufacturer

Product Description (line 1)

ZENIT 3000K 30D WHITE

50010100303003 – ELECTRUM

LED 1208

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)

Efficiency

Peak Intensity and Beam Angle

Correlated Color Temperature, Target/Measured

Color Rendering Index

Color Rendering TM30-18

Color Shift, CIE duv and MacAdam Steps

Flicker

3342 lm – 0% / 100%

101 lm/W

6749 cd – 31,3°



CCT = 3000 K / 3047 K

CRI 94,2

R_f 92,3 – R_g 98,9

Duv 0,0005 – SDCM 1,6

SVM 0,02 – PstLM 0,07

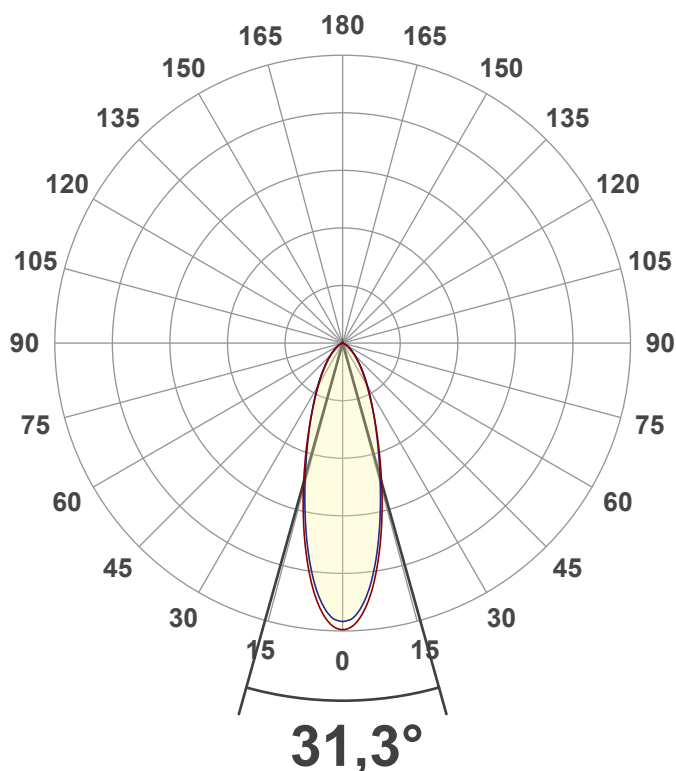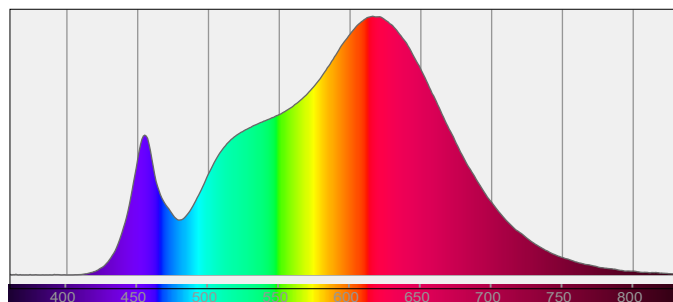

Light Measurement Report

Print date: 19/02/2026

Measurement date and time: 18/02/2026 11:20:23 – Measurement no. VFR-260218-1260-MS


Measurement tracking No. and Link: [VT260218-005109](#)

Operator: LC



Luminous Intensity diagram

Unit: 0-100% of peak intensity

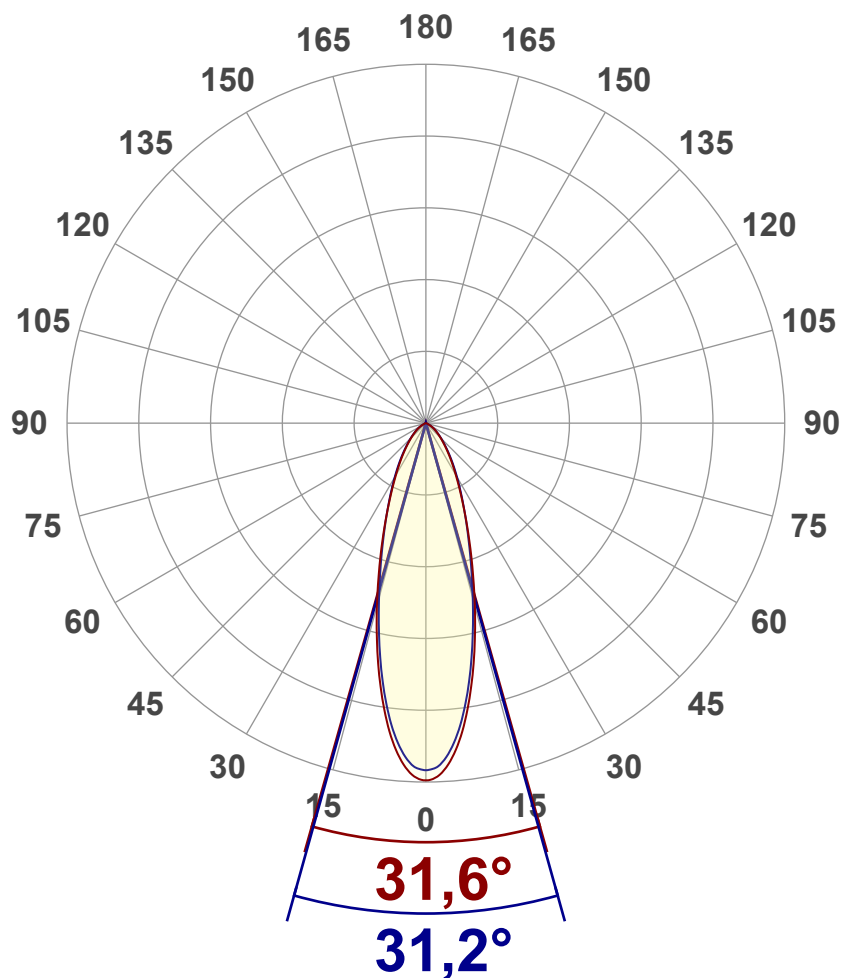

Main Values

Output (total Lumen)	3342 lm
Lumen Up% / Down%	0% / 100%
Peak Intensity	6749 cd
Beam Angle (50%-FWHM)	31,25°

Cut-off Angle

Average 2,5%	112,5°
--------------	--------

Field Angle

Average 10%	75,3°
-------------	-------


Intensity Ratio

In 120° cone	98,0%
In 90° cone	89,0%

C000-C180

C090-C270

Linear distribution diagram - Intensity (candela) vs γ-angle

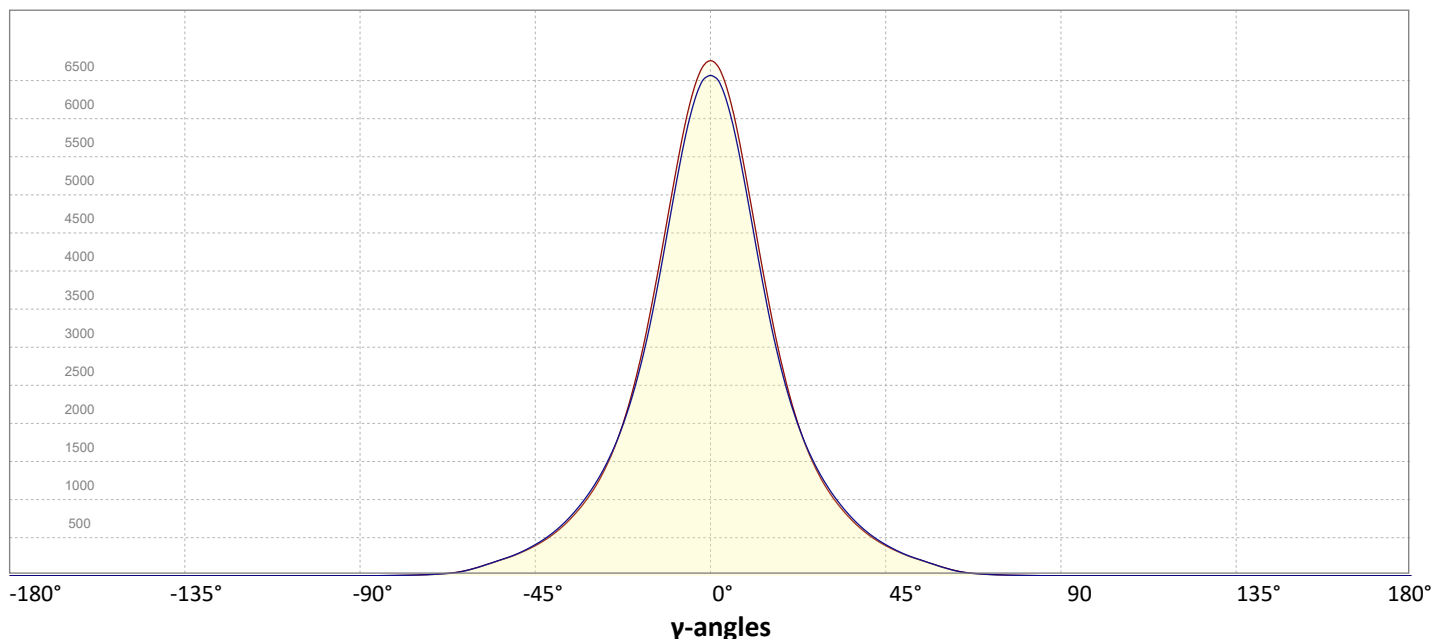

Light Measurement Report

Print date: 19/02/2026


Measurement date and time: 18/02/2026 11:20:23 – Measurement no. VFR-260218-1260-MS

Measurement tracking No. and Link: [VT260218-005109](#)


Operator: LC



Iso-intensity Diagram (Iso-candela)

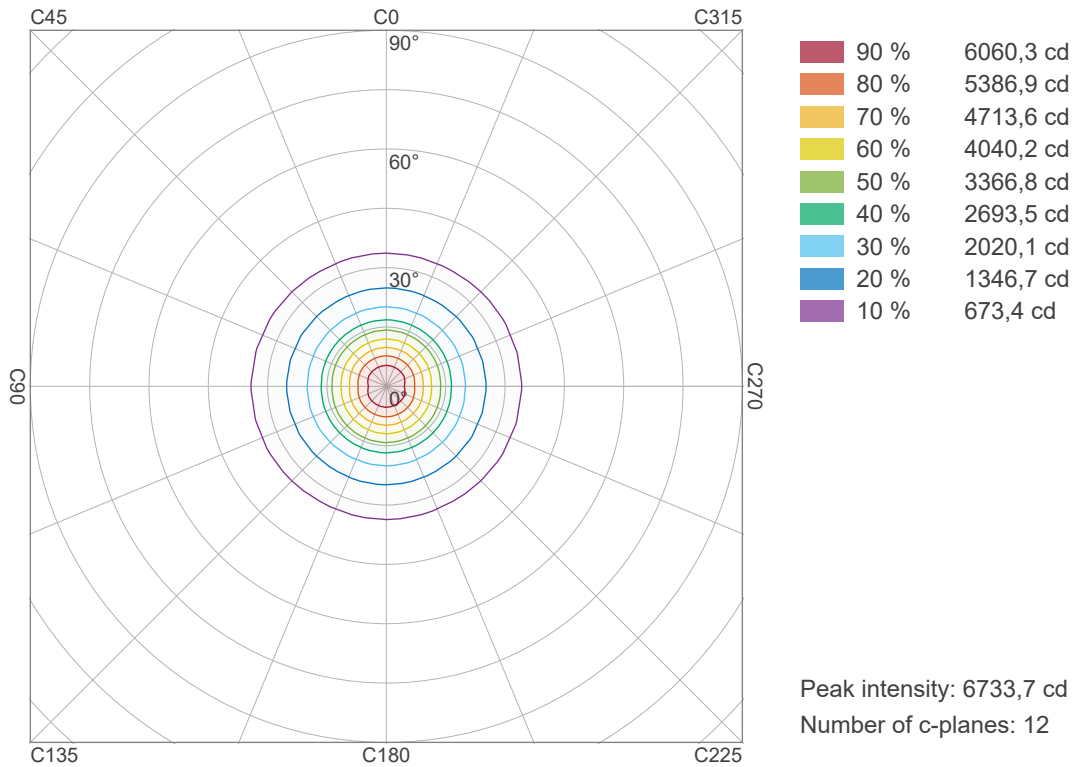

Iso-illuminance Diagram (Iso-lux)

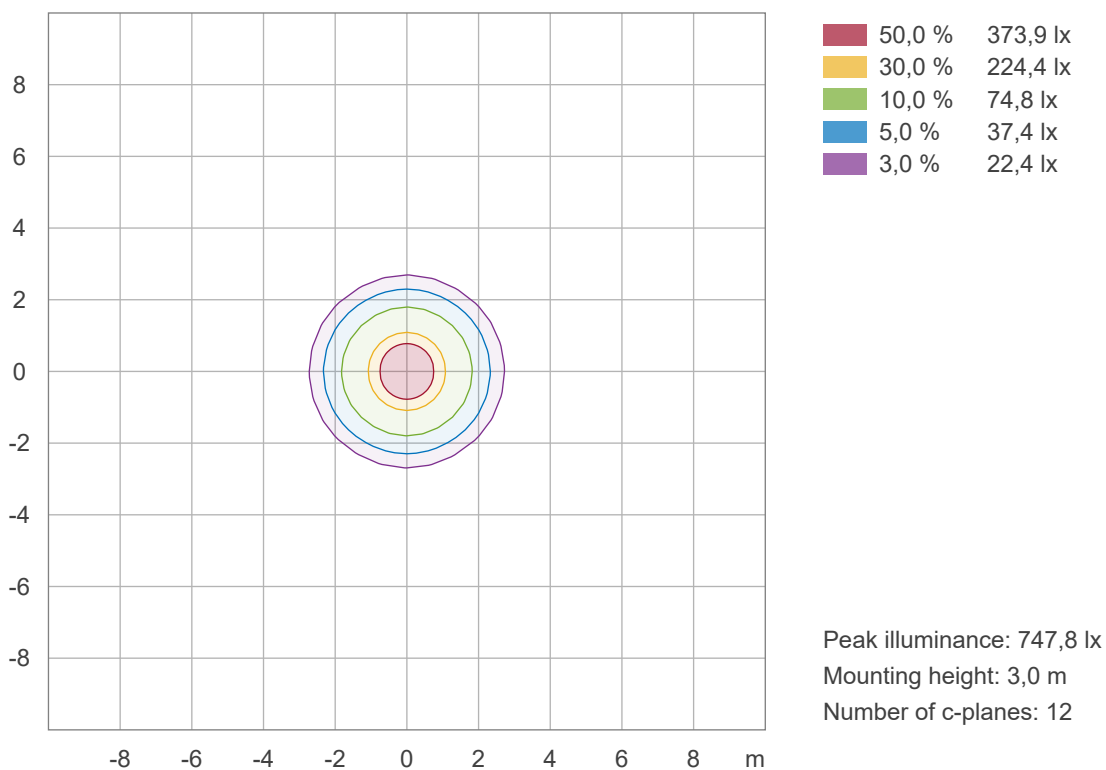

Light Measurement Report

Print date: 19/02/2026

Measurement date and time: 18/02/2026 11:20:23 – Measurement no. VFR-260218-1260-MS

Measurement tracking No. and Link: [VT260218-005109](#)

Operator: LC




Color details


Correlated Color Temperature, Target CCT = 3000 K
Correlated Color Temperature, Measured CCT = 3047 K
Color Rendering Index CRI 94,2
Color Rendering Index, R9 (red component) R9 = 60,0
Color Rendering TM30-18 R_f 92,3 – R_g 98,9
Color Quality Scale CQS = 92,2

MacAdam Steps
Color coordinates CIE 1931 (x;y) = (0,437;0,404)
Color coordinate CIEs 1960 (u;v) = (0,251;0,348)
Color deviation from BBL Duv = 0,0005
Color coordinate CIEs 1976 (CIELUV) (u';v') = (0,251;0,521)


CIE 1931

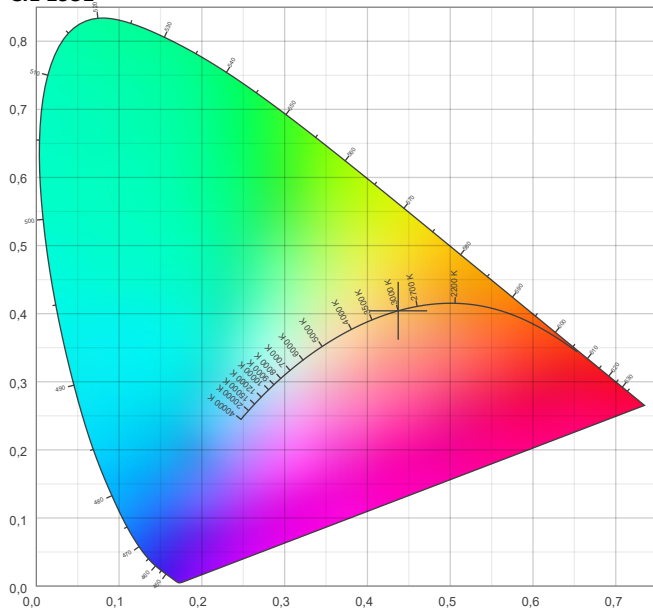

CIE 1931 – zoomed on Planckian locus

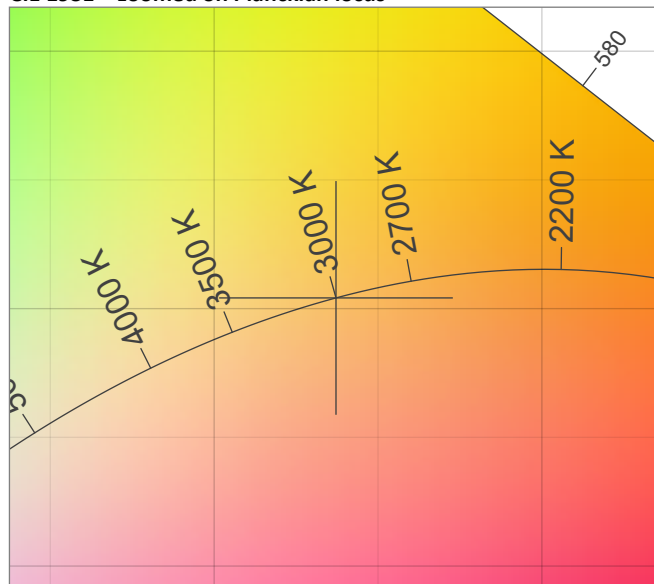


Color Rendering Index per reference color (CIE 1995)

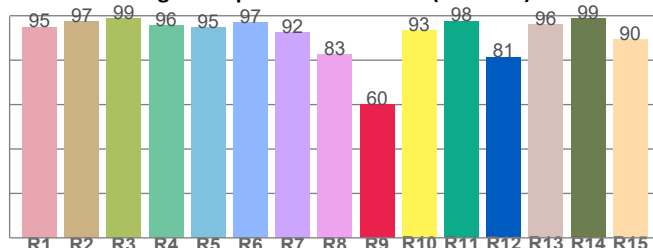


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95,0	97,4	98,9	95,8	94,8	96,8	92,4	82,6	60,0	93,2	97,7	81,5	95,9	98,7	89,5

Spectral power distribution (SPD) / W/nm – 0-100%

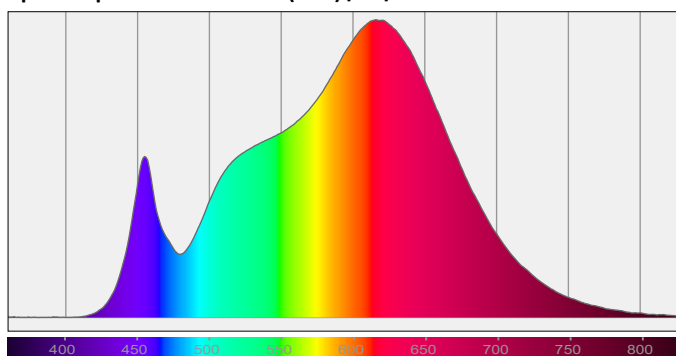


TM30-18 R_f-values per hue bin

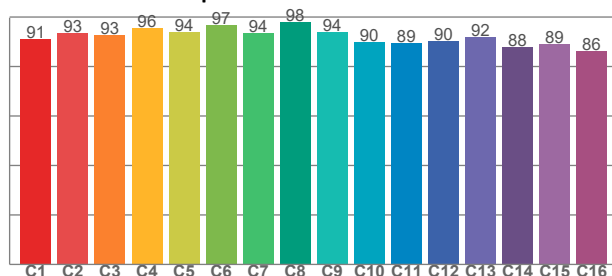

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91,1	93,4	92,9	95,6	93,7	96,9	93,6	98,0	94,0	89,9	89,5	90,4	91,8	88,0	89,0	86,2

Color Quality Scale by reference color

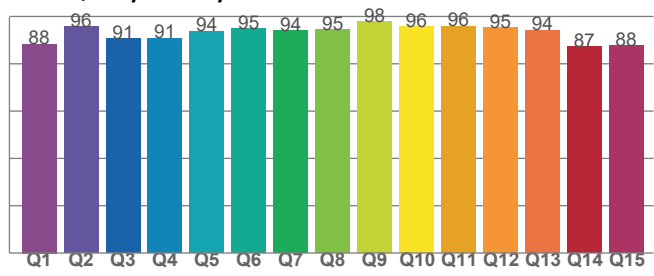

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
88,4	95,7	90,5	90,8	93,7	94,9	93,9	94,5	97,7	95,8	95,9	95,2	94,2	87,3	87,7

Beam Details


Light Measurement Report

Print date: 19/02/2026

Measurement date and time: 18/02/2026 11:20:23 – Measurement no. VFR-260218-1260-MS

Measurement tracking No. and Link: [VT260218-005109](#)

Operator: LC

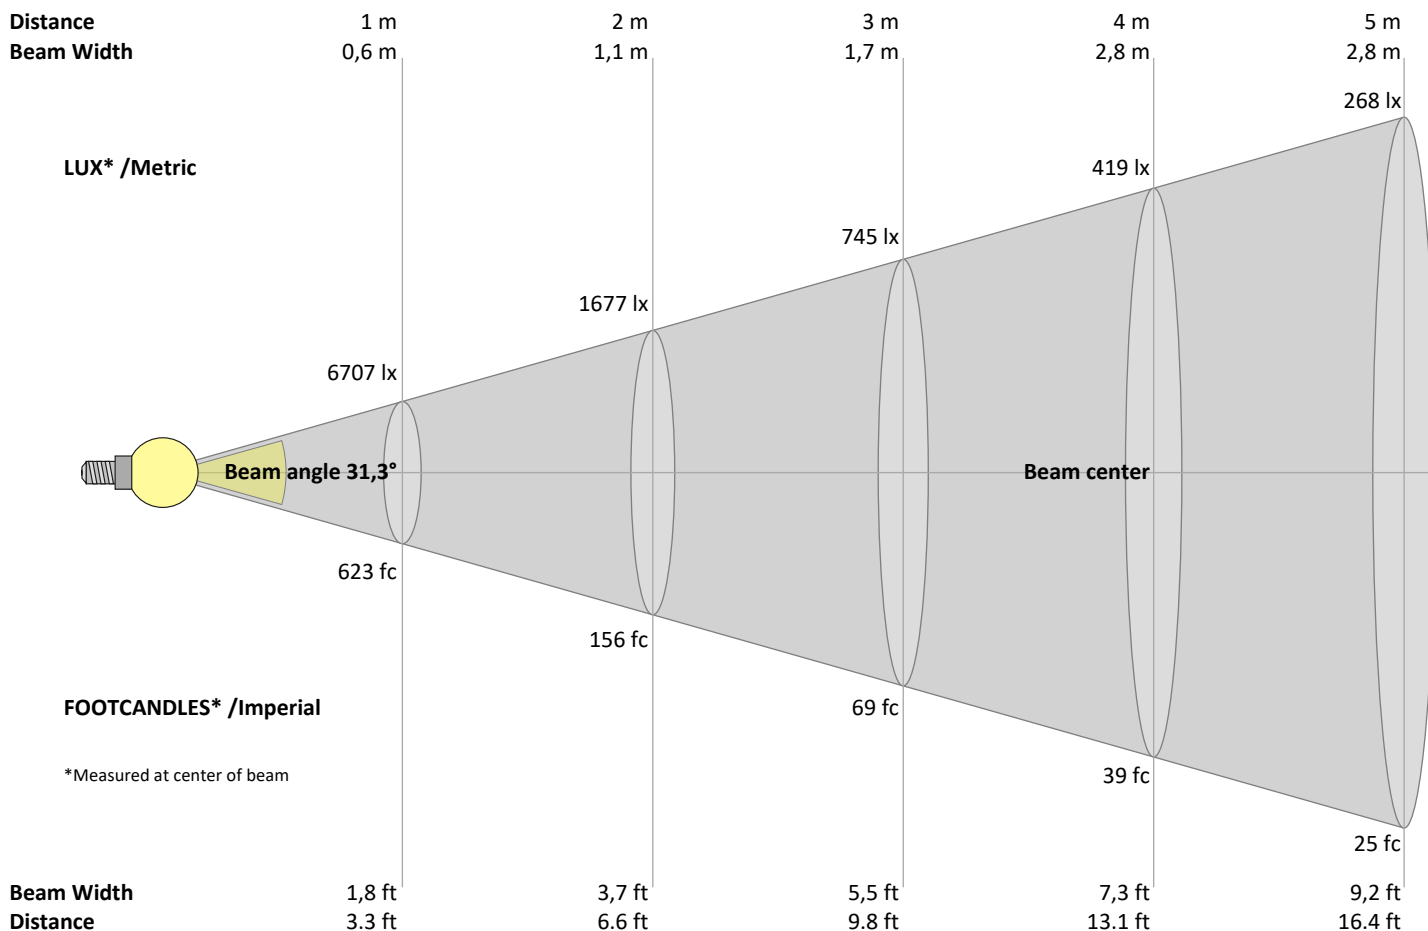

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
6707	1677	745	419	268	186	137	105	83	67	55	47	40	34	30	26	23	21	19	17	lux
623,1	155,8	69,2	38,9	24,9	17,3	12,7	9,7	7,7	6,2	5,1	4,3	3,7	3,2	2,8	2,4	2,2	1,9	1,7	1,6	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
6707	6674	6427	6038	5545	4989	4415	3851	3321	2845	2428	2074	1774	1521	1311	1136	987	858	746	646	cd
100%	99%	96%	90%	83%	74%	66%	57%	50%	42%	36%	31%	26%	23%	20%	17%	15%	13%	11%	10%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
6707	6501	6245	5858	5367	4811	4240	3687	3186	2750	2368	2052	1778	1546	1348	1177	1026	895	778	674	cd
100%	97%	93%	87%	80%	72%	63%	55%	48%	41%	35%	31%	27%	23%	20%	18%	15%	13%	12%	10%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
6707	6674	6427	6038	5545	4989	4415	3851	3321	2845	2428	2074	1774	1521	1311	1136	987	858	746	646	cd
100%	99%	96%	90%	83%	74%	66%	57%	50%	42%	36%	31%	26%	23%	20%	17%	15%	13%	11%	10%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
6707	6501	6245	5858	5367	4811	4240	3687	3186	2750	2368	2052	1778	1546	1348	1177	1026	895	778	674	cd
100%	97%	93%	87%	80%	72%	63%	55%	48%	41%	35%	31%	27%	23%	20%	18%	15%	13%	12%	10%	of 0°val

Light Measurement Report

Print date: 19/02/2026

Measurement date and time: 18/02/2026 11:20:23 – Measurement no. VFR-260218-1260-MS

Measurement tracking No. and Link: [VT260218-005109](#)

Operator: LC



Light Planning – UGR table

Corrected, comprehensive UGR table according to 117-1995

Reflectances												
ρ Ceiling			70	70	50	50	30	70	70	50	50	30
ρ Walls			50	30	50	30	30	50	30	50	30	30
ρ Floor			20	20	20	20	20	20	20	20	20	20
Room size												
H = mounting height above eye level			Viewed Crosswise					Viewed Endwise				
X Y			(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
2H	2H	2H	26,4	27,0	26,5	27,3	27,5	26,5	27,2	26,6	27,4	27,6
		3H	26,2	27,0	26,6	27,2	27,4	26,3	27,1	26,7	27,3	27,5
		4H	26,1	26,9	26,5	27,1	27,4	26,3	27,0	26,7	27,3	27,5
		6H	26,2	26,8	26,5	27,1	27,4	26,3	26,9	26,6	27,2	27,6
		8H	26,1	26,7	26,4	27,0	27,4	26,2	26,9	26,6	27,2	27,6
		12H	26,1	26,6	26,4	27,0	27,4	26,2	26,8	26,5	27,1	27,6
4H	4H	2H	26,2	27,0	26,6	27,2	27,4	26,4	27,1	26,8	27,4	27,6
		3H	26,3	26,9	26,6	27,2	27,6	26,4	27,0	26,7	27,3	27,8
		4H	26,2	26,7	26,6	27,1	27,6	26,3	26,8	26,7	27,2	27,8
		6H	26,1	26,7	26,6	27,0	27,4	26,2	26,8	26,7	27,1	27,5
		8H	26,1	26,6	26,6	26,9	27,3	26,2	26,7	26,7	27,0	27,4
		12H	26,0	26,4	26,5	26,8	27,3	26,1	26,5	26,6	26,9	27,4
8H	8H	4H	26,0	26,6	26,6	26,9	27,3	26,2	26,7	26,7	27,0	27,4
		6H	26,0	26,4	26,5	26,8	27,4	26,1	26,5	26,6	26,9	27,5
		8H	26,0	26,3	26,5	26,8	27,4	26,1	26,4	26,6	26,9	27,6
		12H	26,0	26,2	26,5	26,7	27,3	26,1	26,3	26,7	26,8	27,4
12H	12H	4H	26,0	26,4	26,5	26,8	27,3	26,1	26,5	26,6	26,9	27,4
		6H	26,0	26,3	26,5	26,8	27,4	26,1	26,4	26,6	26,9	27,6
		8H	26,0	26,2	26,5	26,7	27,3	26,1	26,3	26,7	26,8	27,4
Variations with the observer position for the luminaire spacings, S:												
S = 1.0H			1,6 / -1,8					1,7 / -1,9				
S = 1.5H			3,3 / -5,2					3,4 / -5,4				
S = 2.0H			5,0 / -8,0					5,1 / -8,4				

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR (RCR: Room Cavity Ratio)																		
Room Values are expressed as percentage of Lumen delivered to the task surface																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	96	95	93
2	108	103	98	95	105	101	97	94	98	94	92	95	92	90	92	90	88	86
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74
5	92	84	78	73	90	83	77	73	81	76	72	79	75	72	78	74	71	70
6	88	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61
8	80	70	64	60	78	70	64	60	69	63	60	67	63	60	67	62	59	58
9	76	67	61	57	75	66	61	57	65	60	57	64	60	56	63	59	56	55
10	73	63	58	54	72	63	58	54	62	57	54	61	57	54	61	56	53	52

Light Measurement Report

Print date: 19/02/2026

Measurement date and time: 18/02/2026 11:20:23 – Measurement no. VFR-260218-1260-MS

Measurement tracking No. and Link: [VT260218-005109](#)


Operator: LC



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

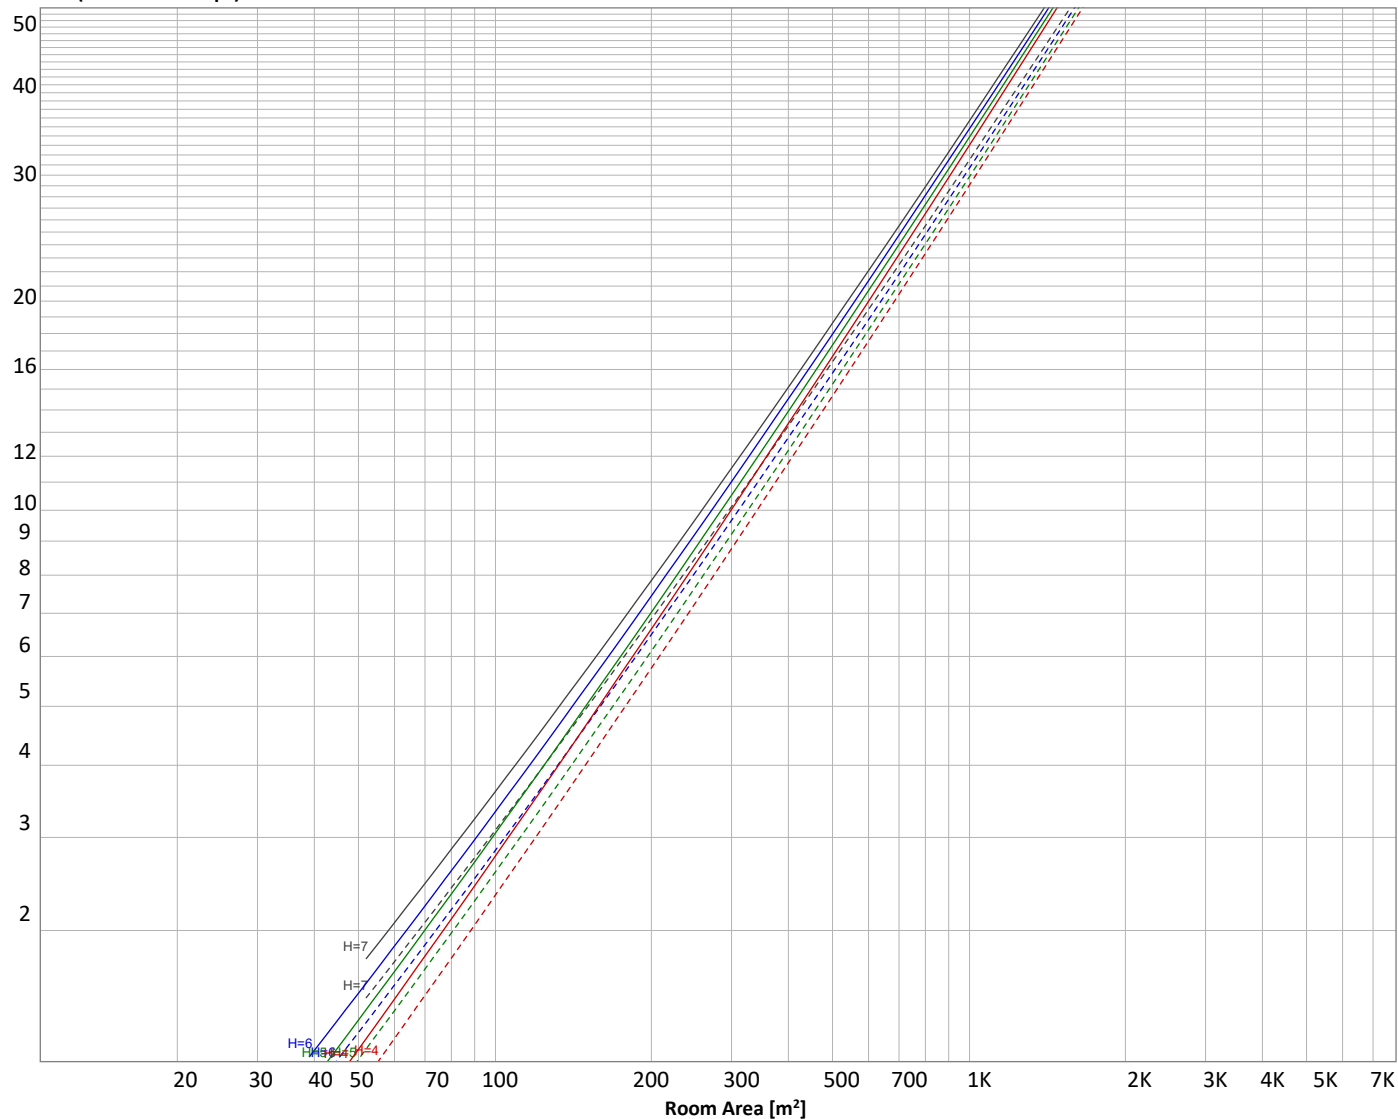

Conditions

H = Room height	Flux = 3342 lm	p(%)		
H _{down} = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	Wall reflectance
H _{work} = Work area height from floor =	0.00 m	-----	70	50
E _{work} = Average lux on work area =	100 lx	_____	50	30
				Floor reflectance
				20

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
550 lm	971 lm	764 lm	510 lm	311 lm	169 lm	52,2 lm	11,4 lm	1,97 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,008 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,001 lm	0,000 lm

Light Measurement Report

Print date: 19/02/2026

Measurement date and time: 18/02/2026 11:20:23 – Measurement no. VFR-260218-1260-MS

Measurement tracking No. and Link: [VT260218-005109](#)

Operator: LC



Outdoor Light Planning

Lumen per Zone

Zone (γ)	Lumen	% Total
0-10°	550 lm	16,5%
10-20°	971 lm	29,1%
20-30°	764 lm	22,9%
30-40°	510 lm	15,3%
40-50°	311 lm	9,3%
50-60°	169 lm	5,0%
60-70°	52 lm	1,6%
70-80°	11 lm	0,3%
80-90°	2 lm	0,1%
90-100°	0 lm	0,0%
100-110°	0 lm	0,0%
110-120°	0 lm	0,0%
120-130°	0 lm	0,0%
130-140°	0 lm	0,0%
140-150°	0 lm	0,0%
150-160°	0 lm	0,0%
160-170°	0 lm	0,0%
170-180°	0 lm	0,0%
Total	3342 lm	100,0%

Intensity peaks

Max intensity	6749 cd
Intensity, 90°	0 cd
Intensity, 0°	6707 cd

Zonal Lumen summary

Zone (γ)	Lumen	% Total
0-30°	2286 lm	68,4%
0-40°	2796 lm	83,7%
0-60°	3276 lm	98,0%
60-90°	66 lm	2,0%
70-100°	13 lm	0,4%
90-120°	0 lm	0,0%
0-90°	3342 lm	100,0%
90-180°	0 lm	0,0%
0-180°	3342 lm	100,0%

BUG rating

	Lumen	% Total
Forward light		
Low(0-30°)	1142 lm	34,2%
Medium(30-60°)	495 lm	14,8%
High(60-80°)	32 lm	1,0%
Very high(80-90°)	1 lm	0,0%

Back light

	Lumen	% Total
Low(0-30°)	1142 lm	34,2%
Medium(30-60°)	495 lm	14,8%
High(60-80°)	32 lm	1,0%
Very high(80-90°)	1 lm	0,0%


Uplight

	Lumen	% Total
Low(90-100°)	0 lm	0,0%
High(100-180°)	0 lm	0,0%

IESNA TM-15-07

Luminaire Classification System For Outdoor Luminaires

BUG rating B3 U0 G0

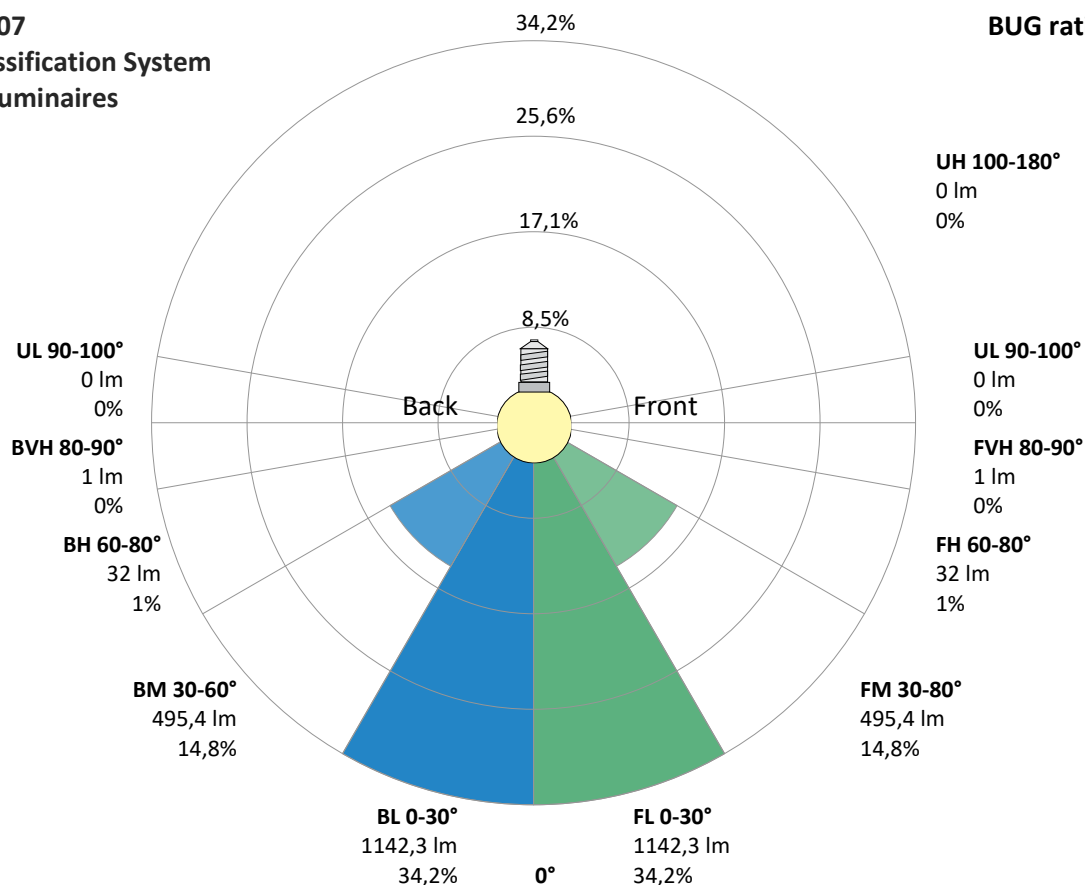

Light Measurement Report

Print date: 19/02/2026

Measurement date and time: 18/02/2026 11:20:23 – Measurement no. VFR-260218-1260-MS

Measurement tracking No. and Link: [VT260218-005109](#)

Operator: LC




Power Details

Input Power

Power feed to light source	33,2 W
Frequency of input power	50 Hz
RMS Input voltage feed, V_{RMS}	217 V
RMS Input current feed, I_{RMS}	0,156 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	33,87 VA
Displacement factor of AC power feed	0,98
Power factor of AC current feed	0,98
Total harmonic distortion of the current	7,56%
Total harmonic distortion of the voltage	3,66%

Input Power Curve

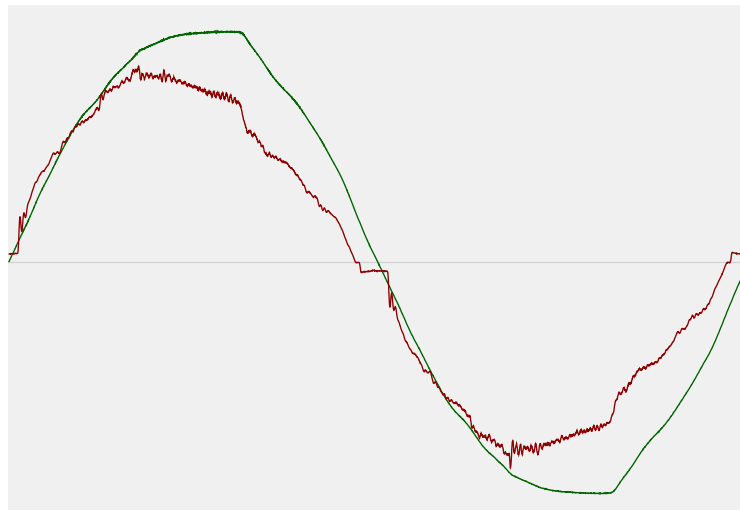

Efficiency

Radiated power efficiency 34,1%



Lumen efficiency 101 lm/W



Stabilization Details

Warmup Conditions

Stable period	15 min
Stable change max	2,0%
Minimum time	15 min

Color Temperature Change

CCT start	2996 K
CCT shift	+4 K
CCT end	3000 K


Warmup Result

Total warmup time	Lamp stabilized in 18 min 28 sec
Warmup variation	-2,8%

Output Change

Output start	3438 lm
Output change	-96 lm
Output end	3342 lm

Stabilization Curve

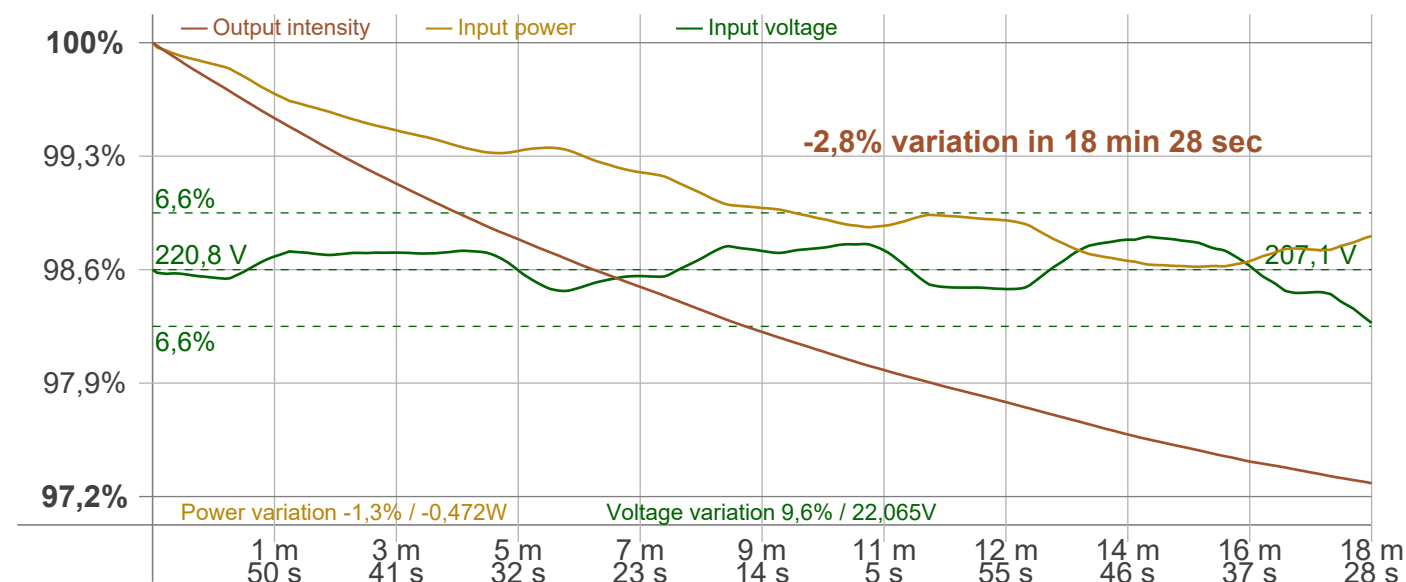

Light Measurement Report


Print date: 19/02/2026
Measurement date and time: 18/02/2026 11:20:23 – Measurement no. VFR-260218-1260-MS
Measurement tracking No. and Link: [VT260218-005109](#)
Operator: LC




Flicker /TLA details

Flicker Meter Type	Viso Systems LabFlicker	Measurement time	
Frequency of input power	50 Hz	PstLM	180 sec
Flicker/TLA sample rate	20000 samples/s	All other indices	1,2 sec
Flicker indices according to Illuminating Engineering Society (IES)		Flicker indices according to California Energy Commission (CEC) 2016b	
Flicker frequency	100 Hz	JA8/10 40 Hz	0,05 %
Percent Flicker	0,56 %	JA8/10 90 Hz	0,1 %
Flicker index	0	JA8/10 200 Hz	0,54 %
TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)		JA8/10 400 Hz	0,54 %
PstLM value (F < 80 Hz)	0,07	JA8/10 1000 Hz	0,55 %
SVM value (80 < F < 2000 Hz)	0,02	Flicker indices according to Lighting Research Center (2015)	
		Perception metric, Assist Mp	0,03

Flicker frame (frame of one flicker period in time domain)

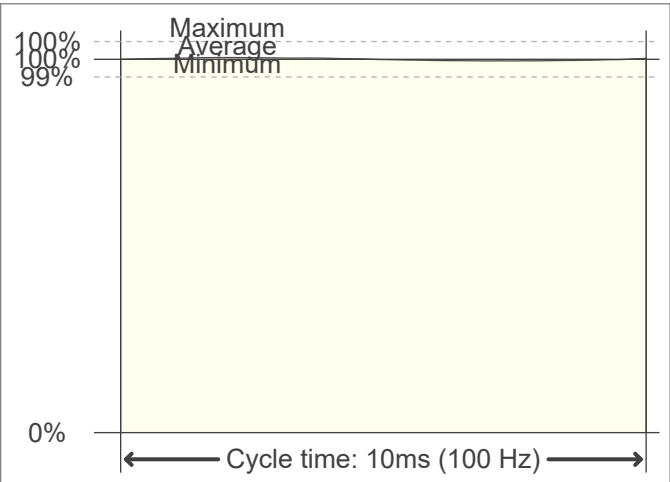

Flicker FFT (flicker curve in frequency domain)

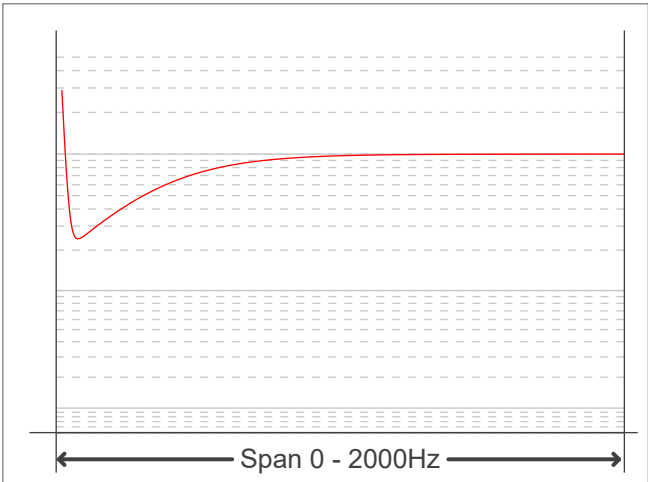

IEEE 1789 Frequency/modulation plot

